


Specifications




Belt Drive System

The Polybelt drive system offers drive-line protection and reliable transmission of power to the heavy duty blades.

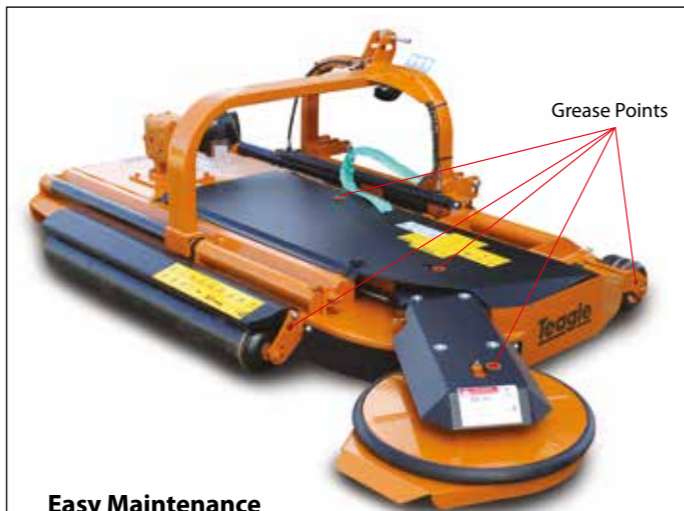

Easy Maintenance

Easy access to all greasing points for routine maintenance.

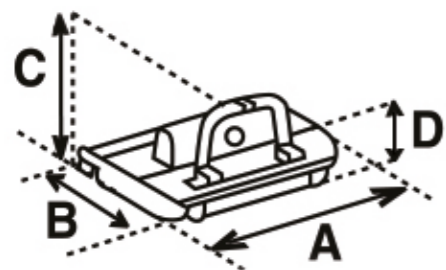

Model	Hydraulic Side Shift (mm)	
	85/165	0/260
Handy 200-250	85/165	0/260
Handy 230-280	95/185	0/280
Handy 250-300	90/210	0/300
Handy 270-320	135/185	45/275
Handy 310-360	155/205	65/295

Model	Width (cm)	HP (Min)	HP (Max)	PTO
Handy 200-250	200/250	40	100	540
Handy 230-280	230/280	40	100	540
Handy 250-300	250/300	70	100	540
Handy 270-320	270/320	80	100	540
Handy 310-360	310/360	80	100	540

Model	A (cm)	B (cm)	C (cm)	D (cm)	Weight (kg)
Handy 200-250	201	180	90	24	520
Handy 230-280	235	185	90	24	550
Handy 250-300	250	155	90	24	580
Handy 270-320	271	180	90	24	600
Handy 310-360	311	185	90	24	660



HANDY

Inter-Row Mower



Teagle Machinery Ltd, Blackwater, Truro, Cornwall, TR4 8HQ
 tel: 01872 560592 email: sales@teagle.co.uk web: www.teagle.co.uk



HANDY02B0AH UK

www.teagle.co.uk

HANDY

Linkage Mounted Inter-Row Mower

The main mower deck has three rotary cutting heads, each with two heavy duty flail blades to ensure a professional finish. Hydraulic side shift and a 600mm articulated cutting head offer unsurpassed access and ease of operation.



TRACTOR SIZE

40 - 100HP

CUTTING WIDTHS

2.0m - 3.6m

In operation



Ideal for mowing around trees, fence posts and solar panels.

Features



1 Rotary cutting head

Articulated 600mm rotary cutting head for inter-row mowing, hydraulically controlled working position, with side protection for the machine and obstacle.



2 Main cutting deck

The main deck has three cutting heads, each with two heavy duty flails for a professional finish.



3 Hydraulic side shift

Hydraulic side shift on all models enables the machine to be offset to the right-hand side for improved access, under and between obstacles.



4 Adjustable rollers

Large diameter adjustable rollers, front and rear to control mowing height and reduce the risk of scalping.